

■ RAIL BULL | TRACK WELDING CARRIAGE WITH OSCILLATOR

The Rail Bull is a track welding carriage designed to produce butt and fillet welds with or without oscillation.

The carriage can work in PA (flat), PB (horizontal vertical), PC (horizontal), PF (vertical up), and PG (vertical down) welding positions.



■ Applications:


- Trailer manufacturing
- Truck tanks
- Oil tanks
- Water storage tanks
- Pressure vessels
- Vessel overlay/Hard facing
- Bridge girders
- Structural steel
- Structural towers
- Panel welding
- Transformers
- Shipyards
- Any application demanding long, continuous welds

Rail Bull moves along either rigid or semi-flexible track.


Both types of tracks are fixed to flat or curved ferromagnetic surfaces by means of dual magnetic units. The minimum curvature radius required is 5 m (16 ft).




Continuous welding



Linear oscillation with trapezoid, triangle and straight line paths




Horizontal speed 0-120 cm/min



Min. path convex radius 5000 mm




Vertical speed 0-110 cm/min




Min. path convex radius 5000 mm

Versatility of applications including out-of-position use

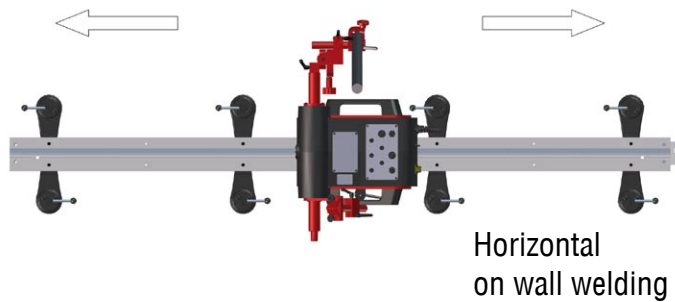


Horizontal on wall welding

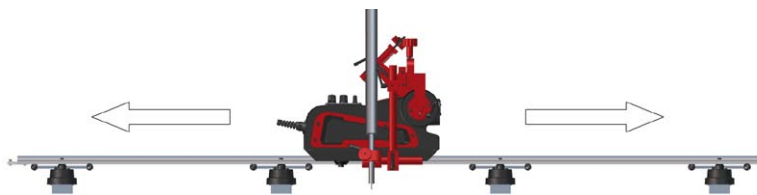


Horizontal welding



Vertical welding

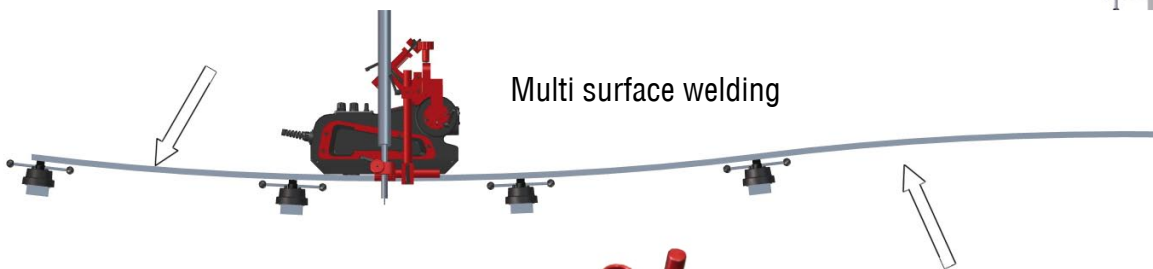





Multi surface welding

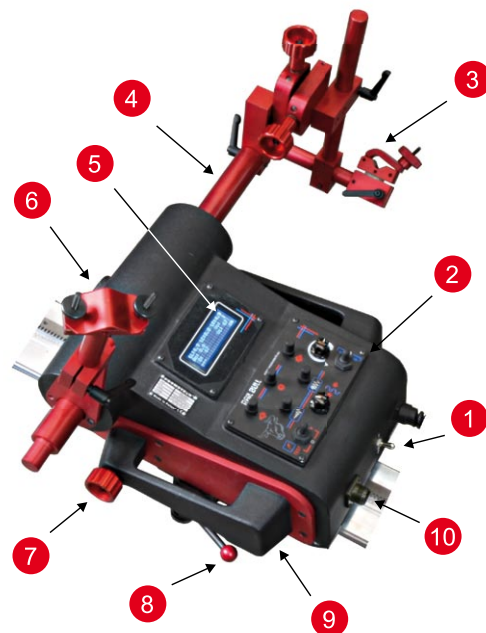

1. Power switch
2. Control panel
3. Torch holder with clamp
4. Oscillator arm
5. Display
6. Cable anchor
7. Drive clutch knob
8. Mounting lever
9. Carrying handle
10. Arc ignition socket



Primary features and benefits:

- Compact, lightweight design with durable aluminum cast housing
- Convenient power supply 115-230V 50/60Hz
- Quick clamping torch holder mechanism for different types of MIG/MAG torches with diameters of 16-22 mm (0.63 – 0.87"); up to 35 mm (1.38") option
- Precise torch adjustment with screw drive cross slide
- Ready to work in both vertical and horizontal positions
- Multifunctional LED display (process parameters & warnings)
- Consistent heat input reduces distortion
- Reduce wasted filler metal – eliminates over welding
- Automatic ARC ON/OFF initiates welding and travel, simultaneously
- Closed loop position control system based on electrical motor with encoder, ensures increased accuracy of speed and positioning
- Improves working environment - removes operator from heat and fumes
- Linear torch oscillator to produce weave welds
- Menu in English (other languages on request)
- Rack and pinion drive
- Continuous welding
- Rigid rail track system

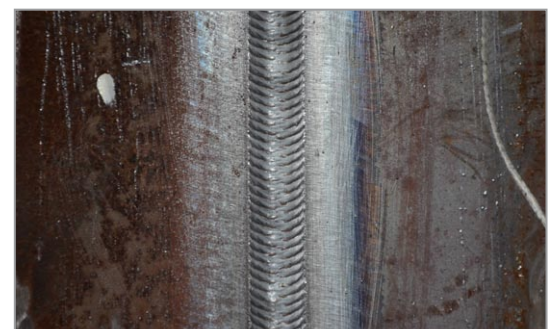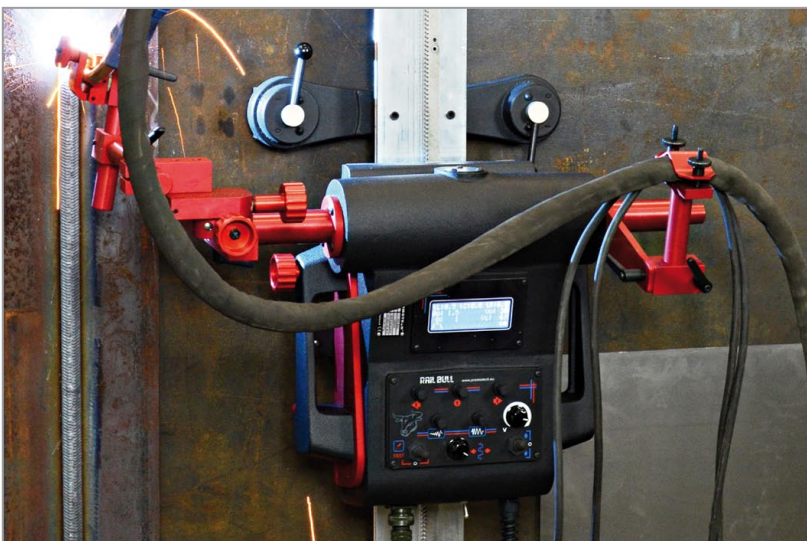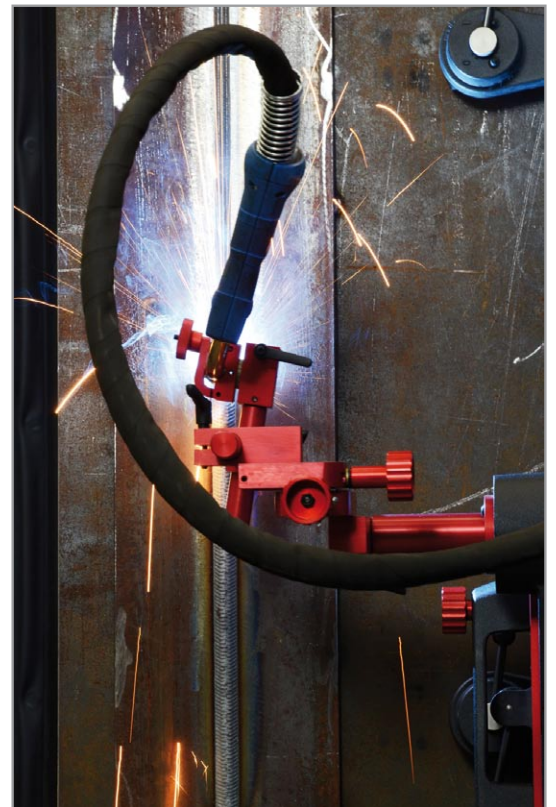
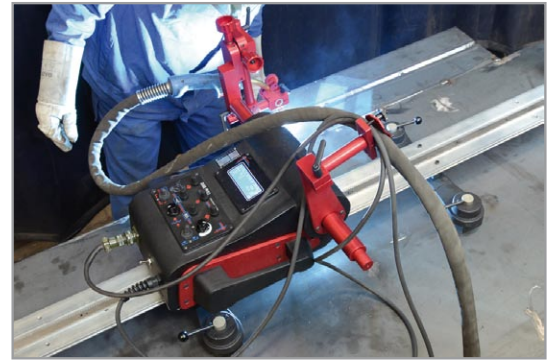


RAIL BULL Technical Specification		
Voltage	1~ 115–230 V, 50–60 Hz	
Power	100 W	
Welding positions	Horizontal	PA (flat), PB (horizontal vertical), PC (horizontal)
	Vertical	PF (vertical up), PG (vertical down)
Minimum track curvature radius	5 m (16 ft)	
Torch type	MIG/MAG	
Torch diameter	16–22 mm (0.63–0.87"); up to 35mm (1.38") option	
Minimum workpiece thickness	5 mm (0.20")	
Horizontal pulling force	350 N	
Vertical pulling force	150 N	
Cross slide adjustment range	0–35 mm (0–1.38") up-down, left-right	
Horizontal speed	0–120 cm/min (0–47.2 in/min)	
Vertical speed	0–110 cm/min (0–43.3 in/min)	
Oscillation type	linear	
Oscillation path	trapezoid, triangle, straight line	
Oscillator arm stroke	0–100 mm (0–3.9")	
Oscillation width	0–50 mm (0–1.9")	
Oscillation speed	0–1500 mm/min (0–59.0 in/min)	
Oscillation delay at center and on ends	0–5 s	
Maximum oscillator pulling force	100 N	
Weight	20 kg (44 lbs)	

Oscillator settings diagram

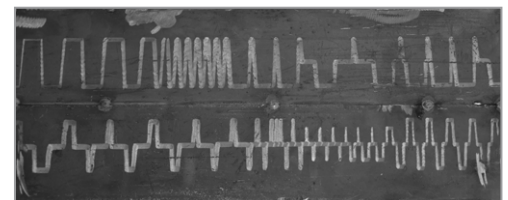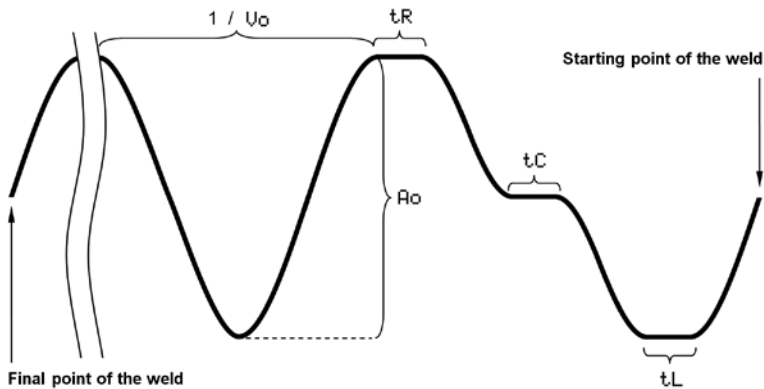

Dimensions:

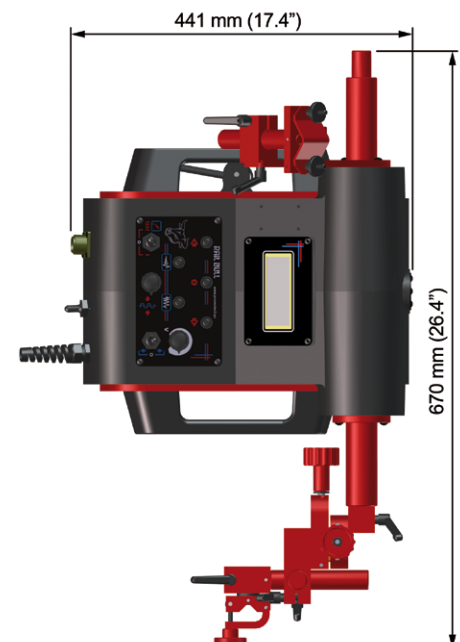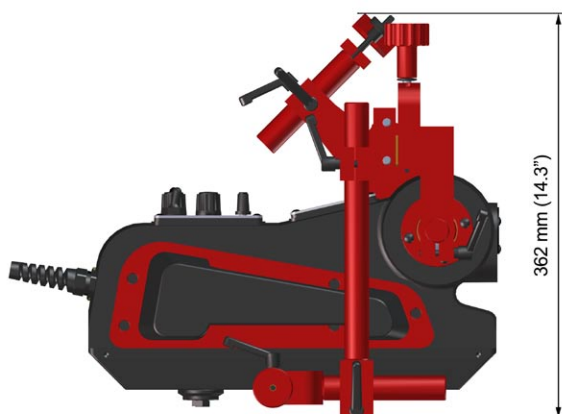

Standard accessories:



Power Cord 3m (10 ft)



KBL-0466-17-00-00-0
Dual Arc Ignition Cable of 6.5 m (21 ft)




UCW-0476-20-00-00-0
Short Rod Clamp Assembly



UCW-0482-17-00-00-0
Cable Anchor


SEMI FLEXIBLE TRACK

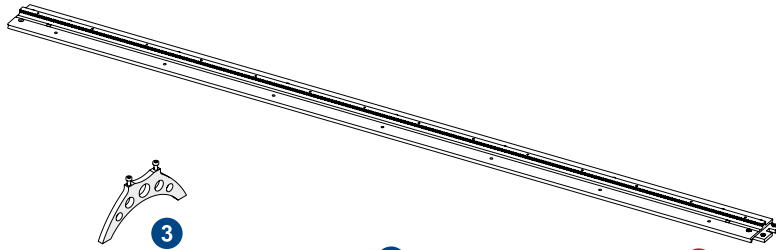

Semi flexible track enables usage on surface with a radius of curvature above 5m.



WSP-0523-12-01-00-0
Track Support for Semi Flexible Track



DYS-0482-15-01-01-0
Bracket for Semi Flexible Track



1 ZSP-0475-56-00-00-0
Track Dual Magnetic Unit



main components




2 PRW-0482-15-05-00-0
Semi Flexible Track

RIGID TRACK

Rigid track allows easy job preparation from out of material.

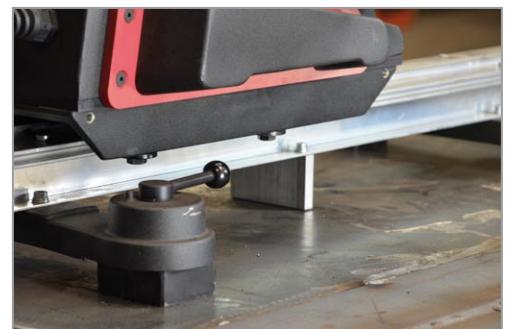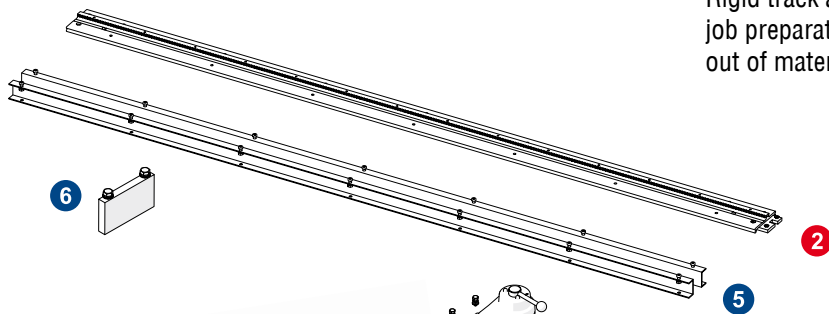

WSP-0523-13-01-00-0
Rigid Track Up-grade Set incl. stiffeners, screws, washers, nuts




WSP-0523-13-02-00-0
Track Support for Rigid Track



Optional accessories for variety of applications:



PKT-0341-13-00-00-0
Gear Rack Adjustment Tool

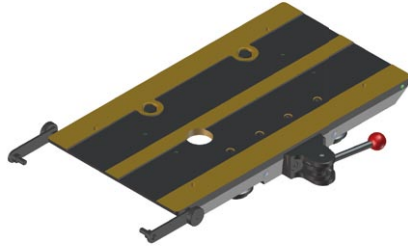


PEP-0482-18-00-00-0
Transport Attachment



ZCS-0476-06-01-00-0
16-22mm Torch Clip



ZRZ-0466-19-00-00-0
22-35mm Torch Clamp

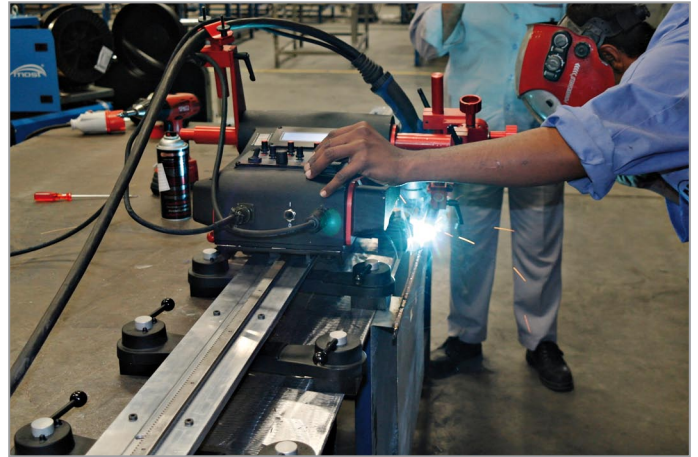

Rail Bull is suitable for work in both horizontal and vertical positions

The Rail Bull welding carriage is supplied in a metal box including:

- welding carriage
- metal box
- cross slide assembly
- short rod torch holder with clamp
- cable anchor
- power cord 3 m (10 ft)
- arc ignition cable of 6.5 m (21 ft)
- 3 mm hex wrench
- 4 mm hex wrench
- operator's manual

More information available at www.promotech.eu



Rail Bull features
User-friendly
control panel



American Welding Society
Supporting Company Member

Mitglied im
DVS
Deutscher Verband für Schweißen
und verwandte Verfahren e.V.



PROMOTECH Sp. z o.o.
ul. Elewatorska 23/1, 15-620 BIAŁYSTOK, POLAND
tel. (+48 85) 678 34 05, fax (+48 85) 662 78 77
marketing@promotech.eu www.promotech.eu

Your local dealer:

